


TECHNICAL DATA SHEET

ReoCo 65/60

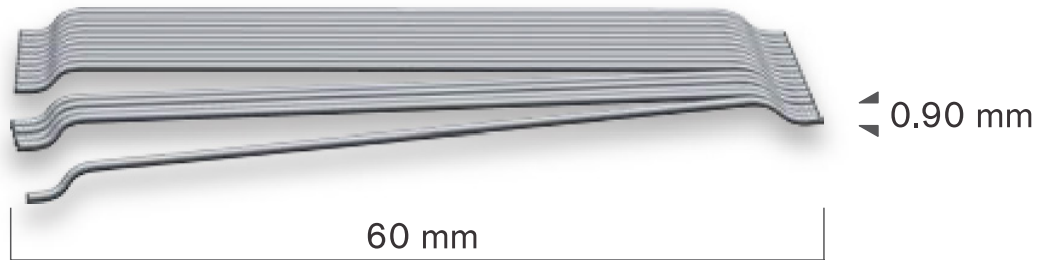

Product Description

ReoCo 65/60 is a premium fibre, engineered to provide high performance results in crack control and reinforcement. ReoCo 65/60 is a Type 1, cold drawn fibre for all concrete applications.

Applications

- High load concrete slab on ground applications in warehousing, mining and workshops
- Suspended slabs (supported)
- Replacement of structural steel
- Precast segments in tunnelling projects

Features

- Degradable glue collated fibres
- Round wire, hook ends
- Bright low carbon steel wire
- Degradable bag

Benefits

- Easy to use
- Even dispersion throughout concrete mix
- High performance
- Saves the contractor time and money
- Helps to improve site safety
- Superior crack control to conventional methods
- Degradable bag means less handling and wastage

Dimensions

- Length: 60mm
- Diameter: 0.90mm
- Aspect ratio (l/d): 65
- Quantity of fibres: 3,197 fibres/kg
- Shape: Round

Properties

- Tensile strength: 1,200 MPa
- Young's Modulus: 210 GPa
- Specific gravity: 7.93

Compliance



Certificates



Packaging/Storage

- 10kg/20kg bags (100 bags per pallet).

